

# FUZE WASH 575™



The FUZE WASH 575™ is a single source par moving head luminaire with a high output 350W Cool White / Daylight 6,800K 95CRI COB LED engine, 11° to 40° motorized zoom, smooth 16-bit pan and tilt movement, electronic strobe and selectable dimming curve effects, DMX and RDM (remote device management) protocol support, 5pin DMX and powerCON TRUE1 in/out connections, LCD menu display with 7 button control panel, multiple unit power linking, flicker free operation for TV and FILM, and a multi-voltage universal auto switching power supply (100-240v).

## FEATURES

**Cool White / Daylight Single Source Par Moving Head**

**High Output 95CRI 6,800K COB LED**

**11° to 40° Motorized Zoom Range**

**Smooth 16-Bit Pan and Tilt Movement**

**Variable Dimming Curve Modes**

**RDM (Remote Device Management)**

**Flicker Free Operation for TV and FILM**

**Multiple Unit Power Linking**

**Optional Snoot Lens**



**PRODUCT SPECIFICATIONS**

**SOURCE**

350W 95CRI 6,800K Cool White / Daylight COB LED  
50,000 Hour Average LED Life\*

\*May vary depending on several factors including but not limited to:  
Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

**PHOTOMETRIC DATA**

35,425 LUX 3,291 FC @6.6' (2m) (11° Full On)  
6,502 LUX 604 FC @6.6' (2m) (40° Full On)

**EFFECTS**

11° - 40° Motorized Zoom  
Electronic Strobe  
Variable Dimming Curve Modes

**COLOR**

Cool White

**CONTROL / CONNECTIONS**

2 DMX Channel Modes (11 Total Channels)  
7 Button Control Panel and LCD Menu Display  
Smooth 16-Bit Pan and Tilt Movement  
RDM (Remote Device Management)  
5pin DMX and powerCON TRUE1 In/Out

**SIZE / WEIGHT**

Length: 13.3" (337.7mm)  
Width: 9.0" (228.8mm)  
Vertical Height: 18.33" (465.7mm)  
Weight: 27.0 lbs. (12.2kg)

**ELECTRICAL / THERMAL**

AC 100-240V - 50/60Hz  
425W Max Power Consumption  
Multiple Unit Power Linking  
5°F to 113°F (-15°C to 45°C)

**INCLUDED ITEMS**

Omega Brackets  
powerCON TRUE1 Power Cable


**APPROVALS / RATINGS**




**ORDERING INFORMATION**

<b>FUZ761</b>	FUZE WASH 575
<b>*** TBD ***</b>	FUZE WASH 575 4-PACK Road Case
<b>FW120SNOOT</b>	FUZE WASH 575 Snoot (Height 2.75" / 69.9mm)
<b>TRIGGER CLAMP</b>	Heavy Duty Wrap Around Hook Style Clamp
<b>SCABLE60</b>	24" (610mm) 60 lbs. (27 kg) Rated Safety Cable
<b>AC5PDMX5PRO</b>	5 ft. (1.5m) 5pin PRO DMX Cable (Additional cable lengths available)
<b>NEU088</b>	3 ft. (1m) PowerCON TRUE1 Power Link Cable

**PHOTOMETRIC DATA**

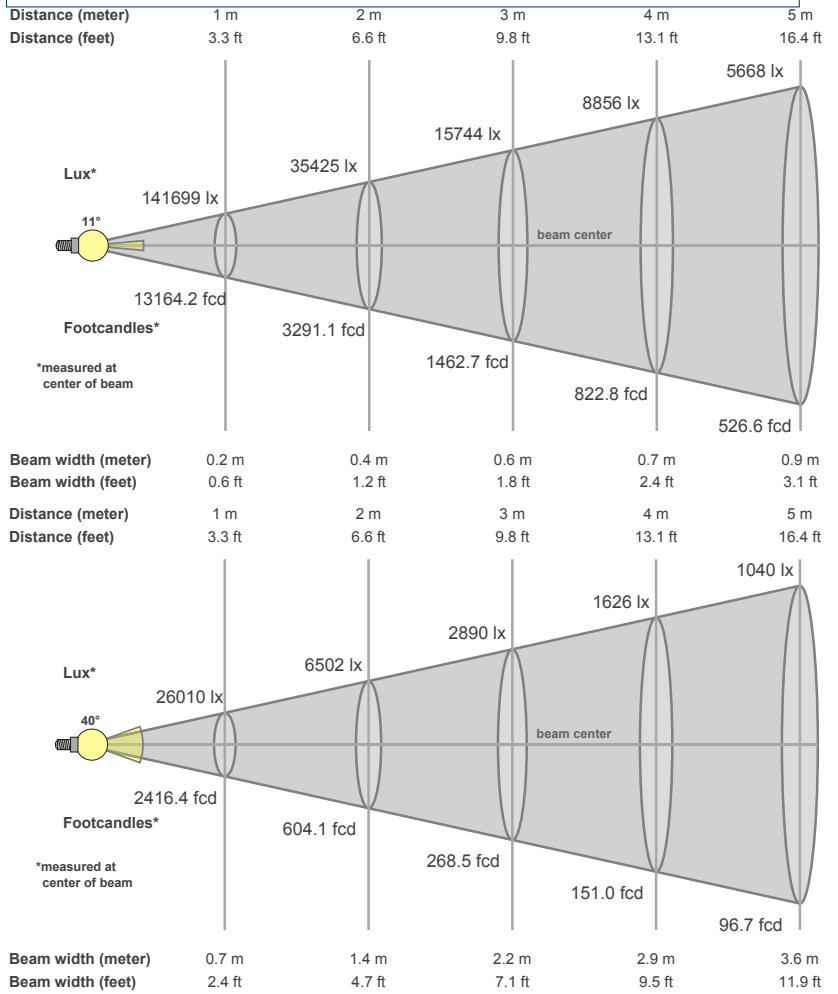

**DIMENSIONAL DIAGRAMS**

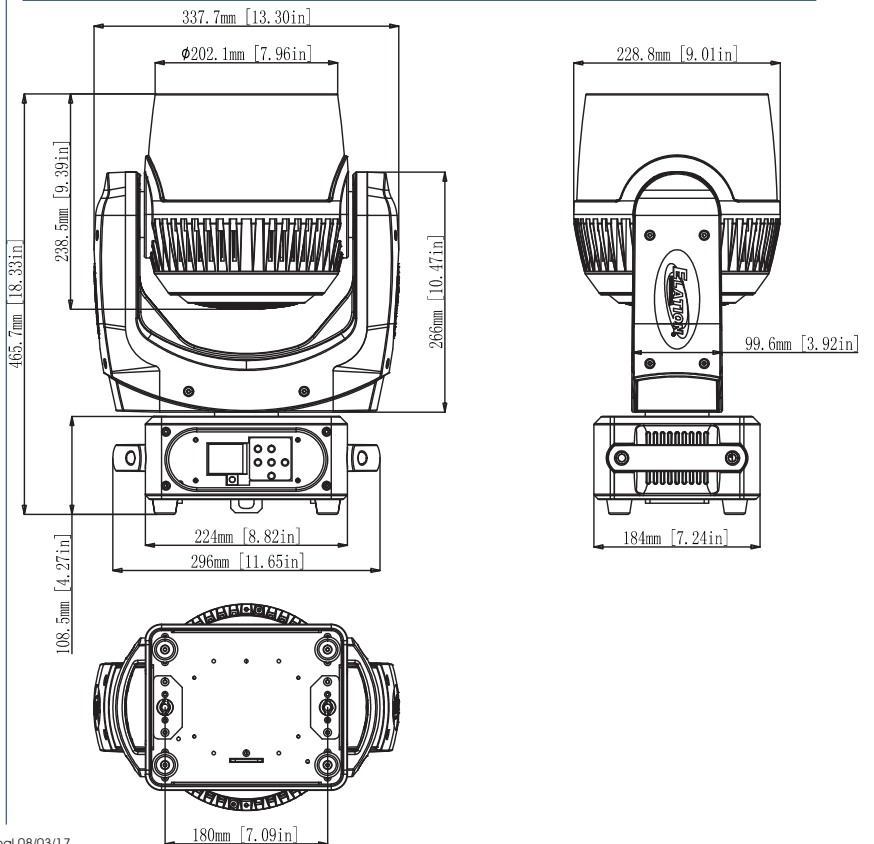

Specifications subject to change without notice ©Elation Professional 08/03/17

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu