

Selecon

STUDIO PANEL MKII



The Studio Panel MKII is a compact, lightweight LED luminaire designed for both studio and location use. Available with a high TLCI rating in tunable white 3200-5600K or fixed whites 3200K and 5600K.

Requiring just 50 watts, these luminaires operate on AC or DC voltage. The battery power input allows location operation using industry standard batteries. Additional holographic diffuser accessories provide beam angle control with minimal light loss.

Selecon

STUDIO PANEL MKII

FEATURES

- Compact lightweight design
- 50 degree beam angle
- 8- or 16-bit control from any DMX512-A control source
- Local rotary control for intensity
- Variable version features 9 built-in color temperature presets including 3200K and 5600K
- Variety of additional accessories
- Battery or mains operated
- Three year limited warranty


Selecon

STUDIO PANEL MKII


	TW	3200	5600
SOURCE			
Lamp	LED		
Wattage (max)	30W	43	41
OPTICAL PERFORMANCE			
Color temperature	3200-5600K	3200K	5600K
TLCI	94	94	94
Beam angle	50°	50°	50°
Dimming	Local DMX 8 or 16-bit	Local DMX 8 or 16-bit	Local DMX 8 or 16-bit
POWER			
Operating voltage	100-240VAC 12-24VDC (battery)	100-240VAC 12-24VDC (battery)	100-240VAC 12-24VDC (battery)
Frequency	50 / 60Hz	50 / 60Hz	50 / 60Hz
Current draw	0.8A (max) @ 115V 0.4A (max) @ 230V	0.8A (max) @ 115V 0.4A (max) @ 230V	0.8A (max) @ 115V 0.4A (max) @ 230V
Power consumption	50W (max)	50W (max)	50W (max)
ENVIRONMENT			
	°C	°F	
Ambient temperature	0-40 °C		
Cooling	Natural convection		
Humidity	5-95% non-condensing		
IP rating	IP20		
PHYSICALS			
IP rating	IP20		
Finish	Black		
Construction	Die-cast aluminium		
DIMENSIONS			
	mm	in	
H x W x D	300 x 545 x 66	11.8 x 21.5 x 2.6in	
WEIGHT			
	kg	lb	
Net weight	2.3	5	
WARRANTY AND APPROBATION			
Warranty	3 years		
Approvals	CE		

Selecon

STUDIO PANEL MKII

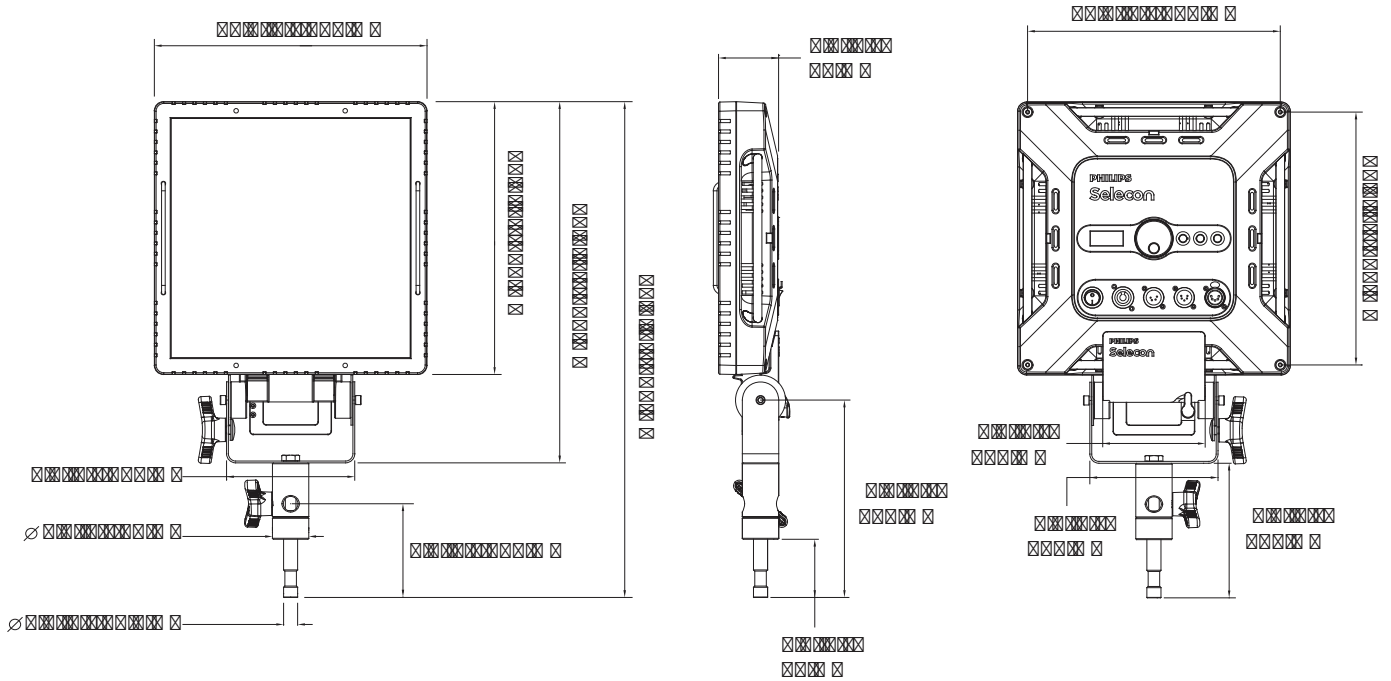

Note: Shown with supplied stud adapter installed. This adapter is removable.

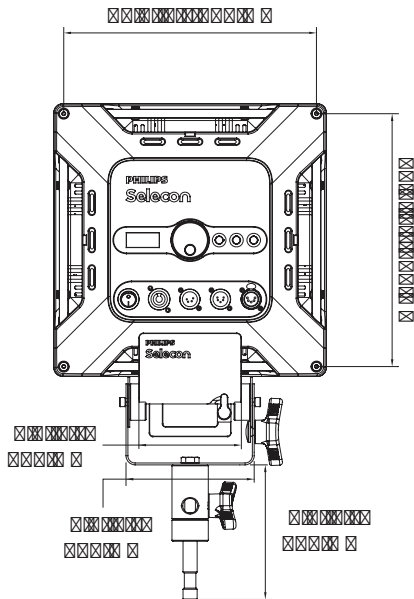

Selecon

STUDIO PANEL MKII

PRODUCT NAME	ORDER CODE
3200-5600K Studio Panel MKII	PLSTUPNL-TW-03 MKII
3200K Studio Panel MKII	PLSTUPNL-3200-03 MKII
5600K Studio Panel MKII	PLSTUPNL-5600-03 MKII
ACCESSORIES	
2 leaf snap on barndoor	PLSTUPNLBD
40° standard spread lens	PLSTUPNLL40
60° Standard spread lens	PLSTUPNLL60
Front mount accessory holder / adapter ring	PLSTUADPTRG
Pistol grip handle	PLSTUPGH
16mm (5/8in) female stud adapter	PLSTUPNLSAF
16mm (5/8in) male stud adapter	PLSTUPNLSAM
Anton Bauer Gold Series battery mount	PLSTUABBH
V-lock style battery mount	PLSTUVLBH
1m AC input cable powerCON to bare ends	PC1BE
3m AC input cable powerCON to bare ends	PC3BE
8m AC input cable powerCON to bare ends	PC8BE

© 2018 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: PLSTUPNL-TW-03 MKII-100-00