



# S.T.A.C. CHAIN

## SPECIAL THEATRICAL ALLOY CHAIN

**WORKING LOAD LIMIT: 6 TONS**

Ideal for theatrical rigging applications where bridle adjustability is required

### BENEFITS & FEATURES

**SUPER STRENGTH**

Grade 80 alloy material with 1/2" diameter and 6 ton working load limit

**HEAT TREATED**

Alloy steel provides long life

**MEETS EUROPEAN STANDARDS FOR LONG LINK CHAIN**

**PROOF TESTED**

Each link proof tested to assure weld and material integrity

**FIRE & ABRASION RESISTANT**


**4:1 DESIGN FACTOR**

**POSITIVE AND EASY ID**

Chain embossed with "STAC 8" and "CM USA" for easy identification as CM alloy. Also tagged with size, grade, reach and working load limit.

**VERSATILITY**

Link accepts up to 3/4" shackle for adjustability

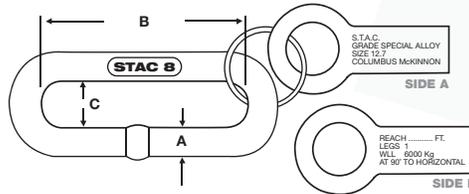

Chain Size (in.)	Working Load Limit (Ton)	Working Load Limit (lbs.)	Nominal Chain Dimensions (in.)			Per Foot		Per Drum		
			Material Diameter A	Inside Length B	Inside Width C	Product Code	Weight (lbs./ft.)	Length (ft.)	Product Code	Weight (lbs.)
1/2	6	12,000	0.53	3.74	0.91	695550	2.03	250	695550D250	506.75
								500	695550D500	1,013.50

\*In-Stock Guarantee available in U.S. & Canada only.

# S.T.A.C. CHAIN SETS

## SPECIAL THEATRICAL ALLOY CHAIN

### BENEFITS & FEATURES

- Cut to desired length to meet your needs
- Each assembly tagged with reach and length
- Black finish
- Fits and functions with the CM line of black shackles
- Wide links allow for easy hook up



\*In-Stock Guarantee available in U.S. & Canada only.

Chain Size (in.)	Length (ft.)	Cut Length Product Code	Weight (lbs.)
1/2	3	695575	6.70
	4	695576	9.94
	5	695577	11.96
	6	695578	13.99
	7	695579	16.01
	8	695580	18.03
	9	695581	20.05
	10	695582	22.07
	11	695583	24.10
	12	695584	26.12
	13	695585	28.14
	14	695586	30.16
	15	695587	32.18





# THEATRICAL SHACKLES

## BLACK POWDER COATED FINISH

**WORKING LOAD LIMIT: 1/2 TO 10 TONS**

### BENEFITS & FEATURES

- Manufactured from technically advanced micro alloy material
- Design Factor 6:1
- Shackles have a Distortion Detector feature designed for visually indicate whether the product has been previously overloaded.
- Working Load Limit and traceability codes shown as permanent marking on body
- All shackles have alloy quenched and tempered pins
- Available in sizes 3/16" to 1"
- Available in black powder coated finish only
- Special testing and certification is available upon request at the time of the order

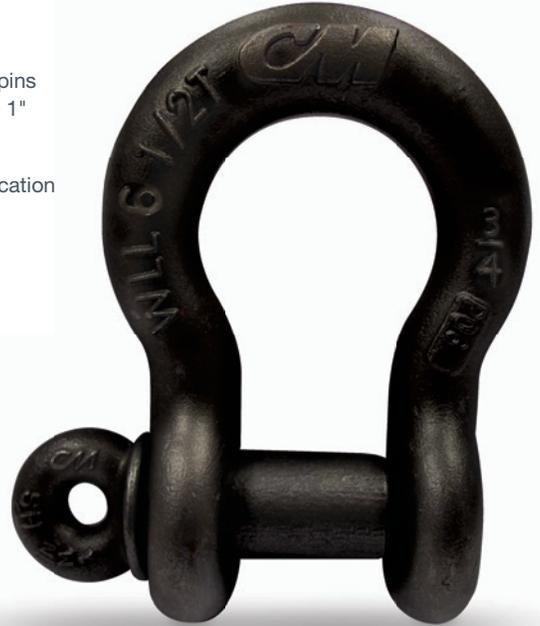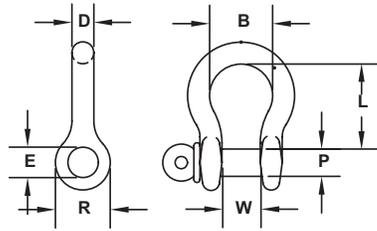

Size D (in.)	Working Load Limit (Ton)	Standard Package	Weight (lbs.)	Product Code	Dimensions (in.)					
					P	E	W	R	L	B min
3/16	1/2	50	0.06	M645B	0.25	0.29	0.38	0.57	0.88	0.58
1/4	3/4	50	0.12	M646B	0.31	0.36	0.47	0.75	1.13	0.75
5/16	1	50	0.20	M647B	0.38	0.45	0.53	0.84	1.25	0.81
3/8	1-1/2	50	0.30	M648B	0.44	0.52	0.66	1.00	1.40	1.00
7/16	2	50	0.50	M649B	0.50	0.58	0.72	1.15	1.69	1.19
1/2	3	50	0.75	M650B	0.63	0.70	0.84	1.34	1.94	1.38
5/8	4-1/2	25	1.30	M651B	0.75	0.83	1.06	1.66	2.41	1.63
3/4	6-1/2	10	2.30	M652B	0.88	0.95	1.28	1.94	2.84	1.89
7/8	8-1/2	10	3.50	M653B	1.00	1.09	1.44	2.14	3.31	2.06
1	10	5	5.00	M654B	1.13	1.22	1.72	2.44	3.75	2.52

\*In-Stock Guarantee available in U.S. & Canada only.



COLUMBUS MCKINNON CORPORATION ENTERTAINMENT PRODUCTS

USA 800.888.0985 | +1 716.689.5400 | Fax +1 716.689.5644 | [www.cm-et.com](http://www.cm-et.com)